

SCOT


ARDOX

CG-P5A

3207

200 GPM — 5 HP

Fire Fighting Wash Down De-Watering Pump

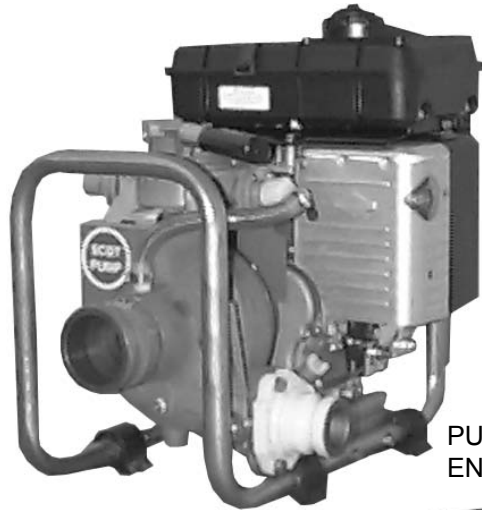

PUMP AND
ENGINE

DIMENSIONS
20.5"L x 14.5"W x 17"H



REFUELING TANK



FLASHLIGHT



ALUMINUM CONTAINER
(Optional)



SUCTION HOSE



DISCHARGE HOSE



ADJUSTABLE FIRE NOZZLE & HOSE
(Optional)

- Lightweight Pump and Engine Weighs Only 65 pounds (without hoses)
- Aluminum Construction, Hard Coated For Sea or Fresh Water Duty
- 200 Gallons per Minute with 10 ft. Suction Lift
- 30 Second Quick Prime® Design
- Aluminum shutoff/throttling valve
- 2-1/2 inch x 15 foot Suction Hose with Stainless Steel Strainer
- 3 inch x 20 foot Discharge Hose for de-watering rate of 12,000 gallons per hour
- Glass Filled Nylon Quick Disconnect Hose Fittings
- 5 HP Briggs & Stratton Recoil Start "Industrial Plus" Gasoline Engine with integral fuel tank
- Siphon pump included for draining fuel
- Coast Guard Approved Flashlight
- 1 gal. 4 oz. refueling tank with automatic 2-way vent valve
- Stainless Steel Carrying Cradle designed for two-hand pickup
- 2 inch x 50 ft. fire hose with adjustable nozzle for fire fighting and washdown. (Optional) Rated 50 GPM at 40 PSI P/N 118.000.480A
- Aluminum Storage Container (Optional) Water Tight Construction 24 inch Dia. x 24 inch Ht. - Wt. 21 pounds P/N 119.000.223
- Weight Pump and Hoses — 86 pounds
- Weight Container, Pump, Hoses, and Refueling Tank 108 pounds
- **NOTE:** All weights are without fuel

81.001.132 Replaces October 1996

3207

FIRE FIGHTING WASH DOWN AND DE-WATERING PUMP

OCT 1997
SCOT